









MIBOXER®

Mi·Light Subordinate New Brand RGB+CCT LED Wall Washer Light

Model No.: RL1-24 / RL2-48

Features

The light housing is made of aluminium alloy with anodizing technology on the surface, and stalinite mirror surface with high light transmittance. Widely used on building, bridge, showcase, and landscape, etc.

-  RGB colors to choose
-  2.4GHz RF Remote control
Control distance 30m
-  Color temperature
2700~6500K
-  Smart phone APP control
Mi-Light WiFi iBox or WiFi Remote is needed
-  Dimmable
Saturation control
-  Support amazon alexa voice control
Mi-Light WiFi Remote is needed
-  Waterproof and dustproof grade IP66
-  Auto-transmitting function
Auto-synchronization function
-  Beam Angle 15°*60°


Parameters

24W RGB+CCT LED Wall Washer Light

Model No.: RL1-24
 Input Voltage: AC100~240V 50/60Hz
 Power: 24W
 Working Temperature: -20~60°C
 Color temperature: 2700~6500K
 Luminous Flux: 1800LM
 Light Efficiency: 75LM/W
 PF: >0.9
 CRI: >80
 Lifespan: 50000h
 Beam Angle: 15°*60°
 Illumination distance: >15m
 IP Rate: IP66
 Product Weight: 2.36kg


48W RGB+CCT LED Wall Washer Light

Model No.: RL2-48
 Input Voltage: AC100~240V 50/60Hz
 Power: 48W
 Working Temperature: -20~60°C
 Color temperature: 2700~6500K
 Luminous Flux: 2800LM
 Light Efficiency: 60LM/W
 PF: >0.9
 CRI: >70
 Lifespan: 50000h
 Beam Angle: 15°*60°
 Illumination distance: >20m
 IP Rate: IP66
 Product Weight: 2.36kg

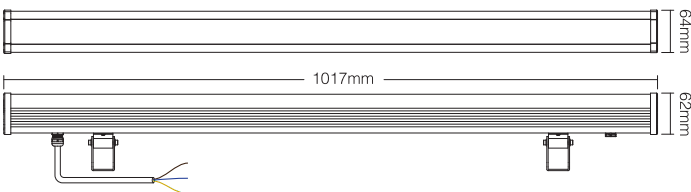


Transmitting mode instruction

One wall washer light can transmit the signals from the remote control to another wall washer light within 30m, as long as there is a wall washer light within 30m, the remote control distance can be limitless.

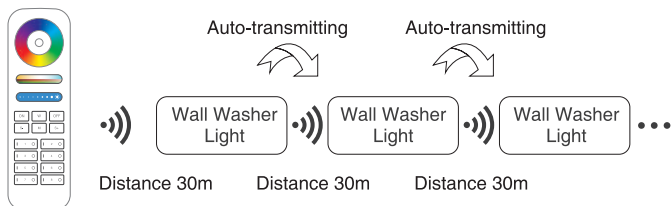

Auto-synchronization function


Different wall washer light can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed, and within 30m distance.

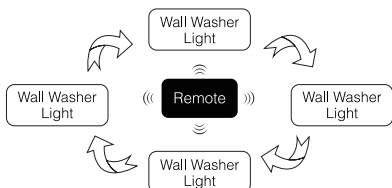


Dynamic Mode Sheet

Number	Dynamic Mode	Brightness	Speed	Saturation
1	Colors gradual change	Adjustable	Adjustable	Adjustable
2	White light Gradual change			Unadjustable
3	RGB gradual change			Adjustable
4	Seven colors jump to change			
5	Jump to change randomly			
6	Red light gradual change +Flash 3 times			
7	Green light gradual change +Flash 3 times			
8	Blue light gradual change +Flash 3 times			
9	White light gradual change +Flash 3 times			Unadjustable


Installation Diagram



1. Fix the lamp body on the base, and rotate the screws.




2. Select the installation place, and fix the base.
Firm ground or wall




3. Adjust the illuminating angle, and tighten the screws.
180°

Connection Diagram

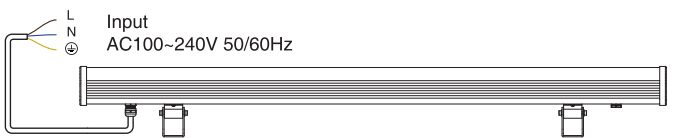

Link/Unlink

Compatible with these remote controls (Purchased separately)

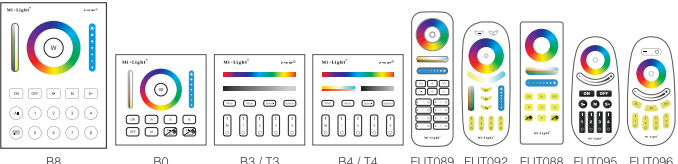

NOTE Lighting can be working after linking with remote; for more details, pls read the remote instruction.

Attention

- When installation, Please switch off power, and switch on power after assuring the correct wiring.
- The light is with waterproof and damp-proof design. Waterproof rate is IP66; it can be working normally in the rain, but cannot work under water.
- The working temperature is -20~60°C, please do not install the light on the area over 60°C to assure the lifespan.